









# Grass Trimmer

Model: LZTR450



## Security regulations

### Following signs means:

	Please read the manual carefully before you operate the tool		Please don gloves to protect your hands.
	Please put on eye-protecting glasses to protect your eyes.		Please wear safety shoes.
	Please use mask to prevent dust.		Please put on earplug.

Thank for your purchase of our garden tools. We believe that you will be satisfied with our garden tools. Please read the manual and all instructions for the nower first before you use it. We won't take any charge of your injure or loss for your wrong operations.

Our grass trimmer is the double insulated II type tool, it has the beautiful shape and it can be handled conveniently with the electrical source protection button and it can be adjusted within 180° . This product has passed multi international inspections.

To check up your lawn whether there are any little stones or other objects, and clear out then before mowing.

Don't put your hands, fingers or feet into any place which the running components may reach.

Don't mow when the grass is wet or you are barefooted or in casual shoe.

Don't knock at trees or palisade, or you will hurt yourself and damage the mower.

Be far away from pedestrian during working, don't wear loose-bodied clothes and jewels.

Children and deformed person shouldn't operate the machine. Avoiding not damaging the wire and causing danger.

It should be kept at which children can't reach and dry and airy.

Be sure that your trimmer is at safe condition. If it is damage, please don't use it and fix it immediately.

Forbit children and the persons who don't familiar with this tool use the product.

This tool should be used in daylight and under the condition of good lighting.

Before using or after the tool being bumped, do not until it be checked.

Forbit use this tool without shield or the shield be damaged.

Please confirm the right length of nylon line to avoid the hurt.

Don't use the metal line and do use the fittings provided by the manufacturer.

Please pull out the electrical source plug when checking, maintaining and cleaning the machine.

Be sure of the airway's clean and draught in any conditions.

### Operations

Install protecting equipments.

Putting the protecting cover into the machine shell as figure, fixing the protecting cover onto the machine shell with four matched screw. Installing protecting plate and wheel. (Figure 1)

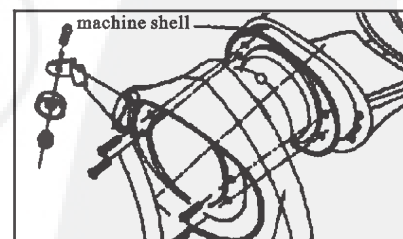


Figure 1

### Adjusting of steering mechanism

Press the steering button as figure, pull the brace rod backward with another hand, separate the brace rod with the locating system in machine shell. Troll the machine shell or brace rod, and release the pulling hand at the same time. When at the required location, the handle locating system will locate automatically. The adjusting work is finished until it can't troll and the controlling button is ejected. (Figure 2)

## Security regulations

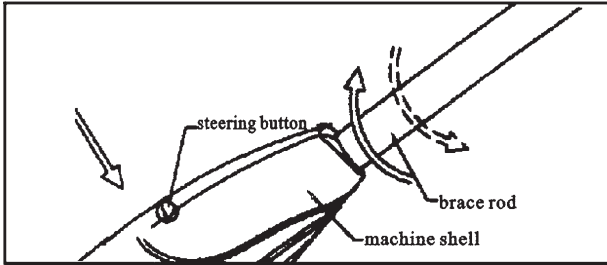


Figure 2

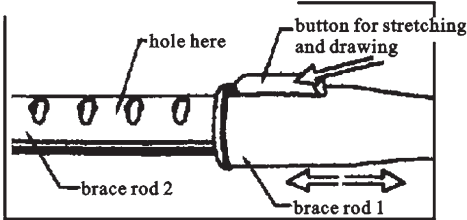


Figure 3

## Adjusting of stretching and drawing mechanism

Press the controlling button of stretching and drawing as figure, pull the brace rod backward with another hand, make the brace rod being slided back and forth, when sliding at the required length, release the controlling button and continue pull the brace rod at the same time. When bearing sound of 'pa', the button reseted and the adjusting work is finished. (Figure 3)

## Wire-clip mechanism

Clipping the wire to the fixed position as figure during working, it will well protect the wire and keep you more safety. (Figure 4)



Figure 4

## Operations of power switch

Press the safety locking button and then press power button, this will power on. (Figure 5)


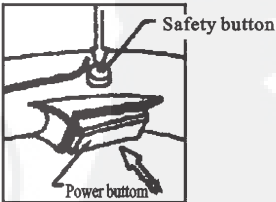


Figure 5

## Change of nylon rope


Unloading the shaving cover and bring out winding base and nylon rope, fold the nylon rope at middle, cross the two terminal of nylon rope into the two little hole of winding base, winding the nylon rope in the slot of base according the direction of arrow, cross the two terminal of nylon rope out of the two hole of shaving base. And put the spring and winding base into shaving base, cover the shaving cover. The changment is finished

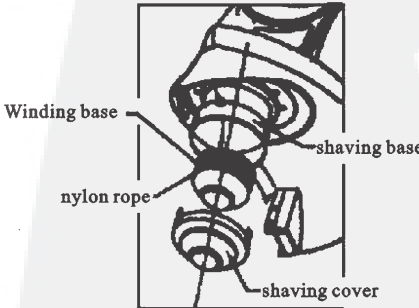

## Operating manual

### Maintenance

1. The trimmer only need very little maintenance to keep its working.
2. To avoid the mower or components being damaged, please be sure that the area you will mow must has no little stone or other hard objects.
3. It is suggested that you check the trimmer and components to find whether it has been loosened, broken or damaged.

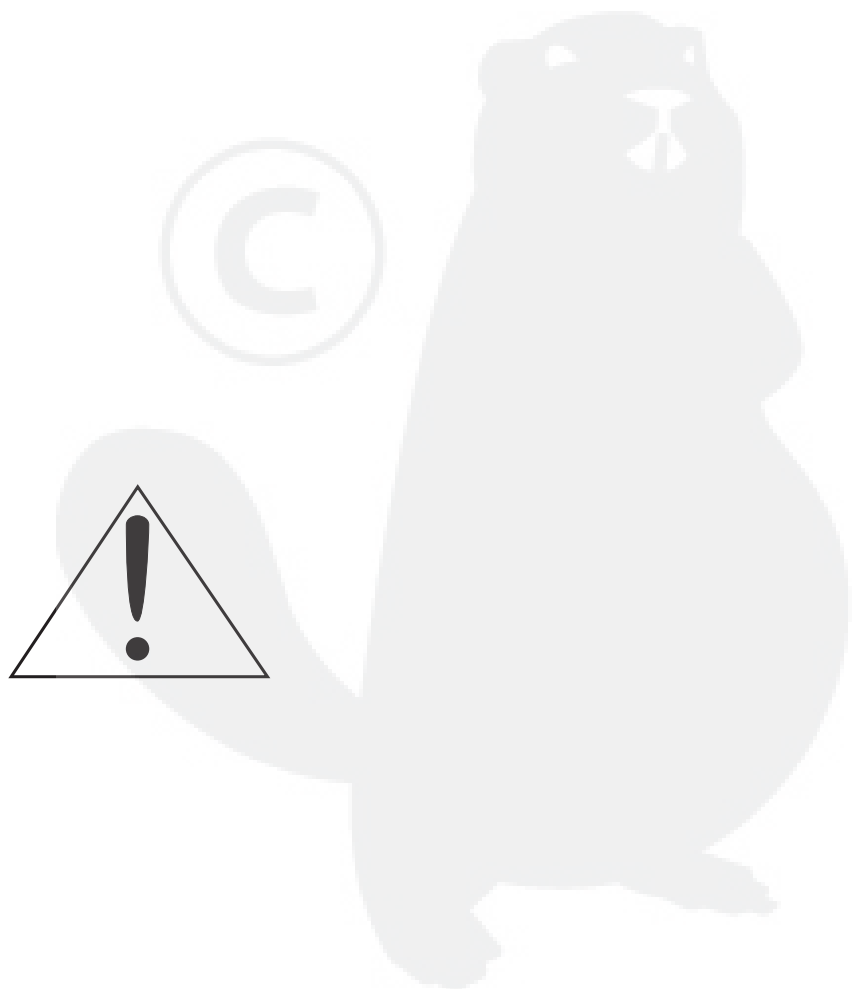



Product Service

# Attestation of Conformity

No. M8A 13 05 62565 162

**Holder of Certificate:** Ningbo Eastpower Tools Co., Ltd.No.177 Wukuang Road, Ningbo  
Economic Development Zone,  
Ningbo, 315803, Zhejiang  
PEOPLE'S REPUBLIC OF CHINA**Product:** Lawn trimmer**Model(s):** EP3000, EP3001, EP3002,  
N1B-EP02-14, N1B-EP02-12, N1B-EP02-10,  
N1B-EP01-320, N1B-EP02-320**Parameters:**

Rated voltage:	230-240V AC
Rated input:	450W (EP3000, N1B-EP02-14) 400W (EP3001, N1B-EP02-12) 350W (EP3002, N1B-EP02-10) 500W (N1B-EP01-320, N1B-EP02-320)
Rated frequency:	50Hz
Protection class:	II
Degree of protection:	IP20

**Tested according to:** EN 60335-1:2012  
EN 60335-2-91:2003  
EN 62233:2008

This Attestation of Conformity is issued on a voluntary basis according to Council Directive 2006/42/EC relating to machinery. It confirms that the listed equipment (not Annex IV equipment) complies with the principal protection requirements of the directive. It refers only to the sample submitted to TÜV SÜD Product Service GmbH for testing and certification. See also notes overleaf.

**Test report no.:** 70211302504-03**Valid until:** 2018-05-02**Date,** 2013-05-03  
(Long Chen)**CE** After preparation of the necessary technical documentation as well as the EC declaration of conformity the required CE marking can be affixed on the product. Other relevant directives have to be observed.

Page 1 of 1