



USER MANUAL IN ACCORDANCE WITH PPE REGULATION 2016/425 CE

Factory model designation: SG2612
Distributor model designation: OZAKI 9107012


ATTENTION: These safety goggles do not offer unlimited eye protection and are not unbreakable. They are designed to protect the user from eye damage caused by mechanical hazards, droplets and liquid splashes. For your own protection, please read these instructions in full before use.

These protective goggles comply with European Regulation 2016/425/EU on personal protective equipment and are manufactured in accordance with the requirements of standard EN166: 2001 (NF EN166: 2002) and are CE marked.

Areas of Use:


These goggles are marked on the frame and/or optics with a series of numbers and symbols indicating the manufacturer, field of use, protective capabilities and performance of the optics. The markings have the following meanings:

Marking on frames and optics

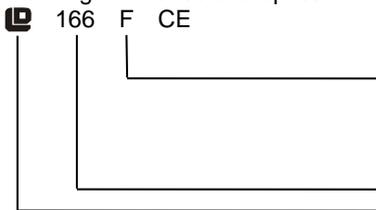

Mechanical strength (frame)

- S** Reinforced mechanical strength for particles (5.1m/ s)
- F** Protection against high-velocity particles of low energy (45m/ s)
- B** Protection against high-velocity, medium-energy particles (120m/ s)
- 166** standard EN166 = safety goggles
- LD** Manufacturer identification

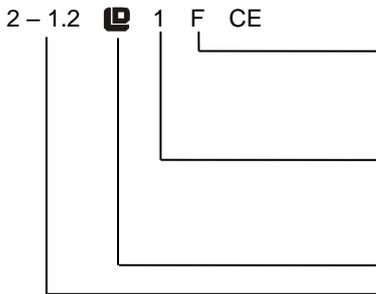

Mechanical resistance (optical)

- S** Reinforced mechanical strength for particles (5.1m/ s)
- F** Protection against high-velocity particles of low energy (45m/ s)
- B** Protection against high-velocity, medium-energy particles (120m/ s)
- Optical class (tolerance of optical power depending on duration of use)**
- 1** Permanent wear
- 2** Occasional wear
- 3** Exceptional wear (not suitable for long-term work)
- LD** Manufacturer identification

| | | | |
|---|----------|---|--------------------|
| Standard Depending on Application: | Code | - | Echelon |
| EN 166 Safety goggles | - | - | - |
| EN 170 Ultraviolet filters | 2 | - | 1.2 to 5(*) |

(*) Lenses marked 2-1.2 filter out 99% of UV up to 380nm, but do not protect against direct sunlight.

If the symbols S, F and B are not common to the eyepiece and frame, then the lowest level should be assigned to the full eye protector. The letter T immediately after the impact symbol authorises use for particles launched at high speed at extreme temperatures. If the letter T is not present, the protector should be used at room temperature.

READ THE FOLLOWING CAREFULLY:

CARE: Glasses should be cleaned with soapy water, optical solution or a mild alcoholic solution.

MAINTENANCE: Like all protective products, its lifespan will depend on the area of use, care and maintenance. You must always use original parts when replacing pitted, scratched or damaged goggles. If the frame is damaged, replace the entire item. After using your protective goggles or visor, it must be placed back in its original protective packaging. In all cases, the product must be replaced after a period of two years.

ATTENTION: In particular circumstances, some extremely sensitive skins may experience allergies following skin contact with certain materials.

Protection worn over corrective eyewear can transmit the impact of a shock and constitutes a potential risk for the user.

SPARE PARTS: The lenses on this product cannot be replaced.

TRANSPORT: The protective goggles must be transported in its original packaging or in a clean plastic bag.

STORAGE: Store in a dry place (humidity <90%) at room temperature (between 5 and 40°C).

RECYCLING: This product and its packaging are made up of various plastic components. Please ensure that you comply with the legislation in force in your area so that they can be recycled responsibly.

Manufactured by: LONG DAR PLASTIC CO. LTD.
140 Wu Gong Road, New Taipei Industrial Park, 24886 New Taipei City, Taiwan
www.longdar-safety.com

Imported by: F1 DISTRIBUTION – Creule Industrial Zone 59190 Hazebrouck - FRANCE
Phone: 0328509595 fax: 0328501001 www.f1distribution.com