


XLIFT PRO (Maximum charge : 130 kg.)

A. Assembly.

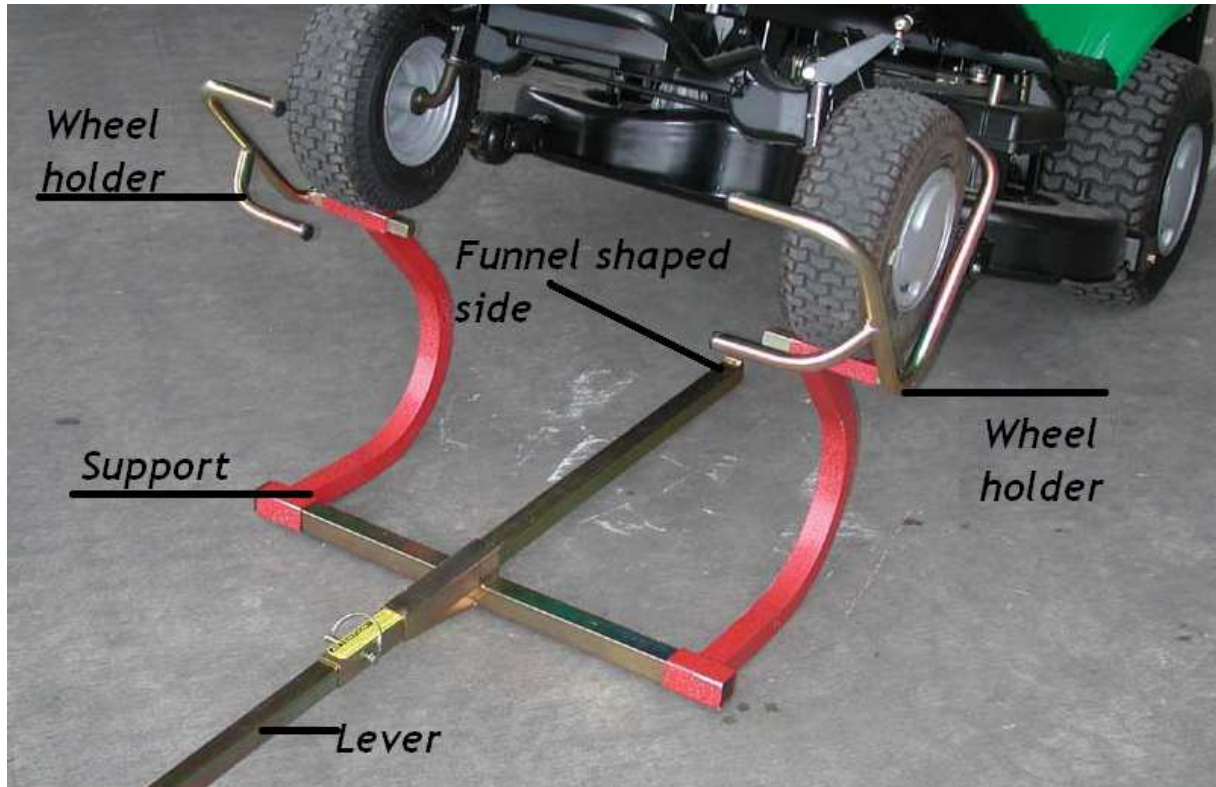

1. Put the wheel holders (Left and Right) into the red support. They must be at least 6 cm into the support to make it possible to fix them with the butterfly nuts.
2. Assemble the lever and fix it on the support. Make sure that the funnel shaped side of the lever is on the tractor side and don't forget to put the hairpin to secure the lever.
3. Look at the picture on the box if the lift is correctly assembled.

B. How to use

1. Choose a flat levelled ground.
2. Loosen the brakes of the tractor.
3. Make the lever as long as possible to his maximum length and fastens.
4. Extend or shorten the wheel holder and fastens with the butterfly nut .Move the tractor into the wheel holders.
5. Pull on the lever till the lever touch on the ground. Make sure the tractor stays stable before you loosen the lever.
6. To put the tractor again on the flat levelled ground inverse the instructions.