



SB4500PRD BROADCAST SPREADER


NO ASSEMBLY REQUIRED
READY TO USE

guide!

04/01



MADE IN
☆☆☆☆☆
USA

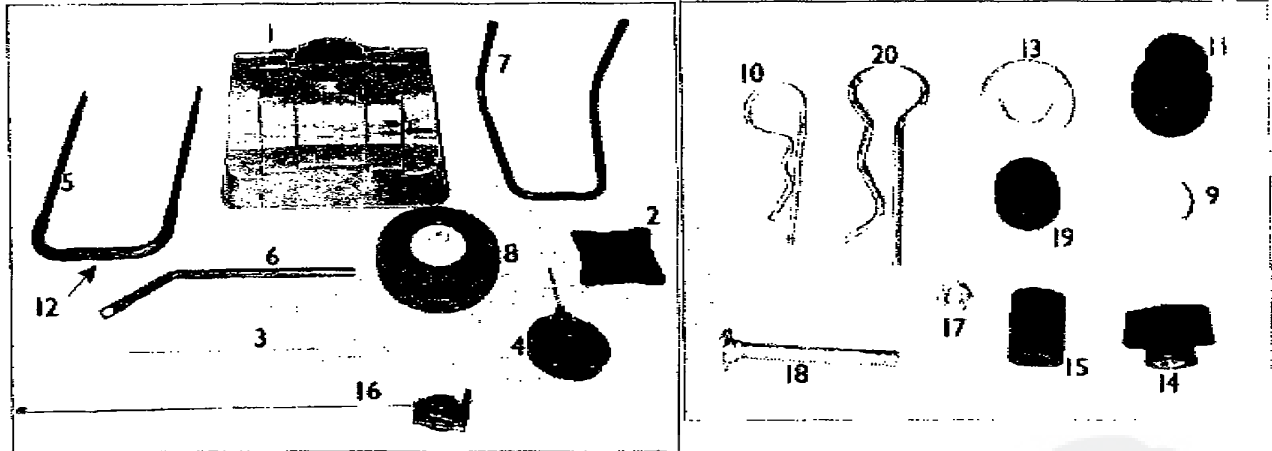

PLEASE DO NOT RETURN THIS MERCHANDISE TO THE STORE. CALL US AND WE WILL TAKE CARE OF ANY PROBLEM YOU MIGHT HAVE WITH THIS PRODUCT. Phone (800) 225 - 5891 EXT. #226

HOW TO ORDER PARTS

When ordering parts always give model number, part number and part description.

Send To: Parts Division
316 Limit Street
Lincoln, IL 62656

Phone (217) 735-1590
FAX (217) 735-2435

LIMITED WARRANTY

This unit is warranted against defects in materials and workmanship to the original purchaser, under normal use and service, for a period of ninety (90) days from date of sale. During the Warranty Period, we will repair or replace at our option free of charge to the original purchaser, any part of the Unit that our examination shows to be defective in workmanship or materials. This Warranty Does Not apply to damage caused by misuse, abuse, neglect, accident, normal wear, or alterations by unauthorized persons.



PRECISION PRODUCTS, INC.

2574


Retain for future reference **TIP:** Many of these hardware parts can be purchased at your local hardware store.
Parts List * SB4500PRD

Ref No	Parts No	Description	Qty	Ref No	Parts No	Description	Qty
1	2570H	Hopper	1	15	2503	1/2" x 7/8" Spacer	1
2	1073	Spinner Disc	1	16	2441	Control Cable Assembly	1
3	2571	Axle 5/8" x 20-1/2"	1	17	1270	1/4" Hex Head Nut	4
4	2573G	Gear Case Assembly	1	18	1868	1/4" x 2-1/4" Carriage Bolt	7
5	2888	Handle	1	19	1053	7/8" Tube Plug	2
6	2572	Hopper Support	2	20	5060	Drive Wheel Clip	1
7	2887	Leg Stand	1				
8	2410	Wheel	2				
9	3410	5/8" Top Hat	1				
10	1042	Agitator Pin	2				
11	6214	5/8" Bushing	2				
12	2415	Handle Cover	1				
13	1646	5/8" Flat Washer	3				
14	2828	Wing Nut	3				

USING YOUR SPREADER SB4500PRD Broadcast Spreader


STEP 1

Un-fold Handle
and tighten Wing
Nuts.

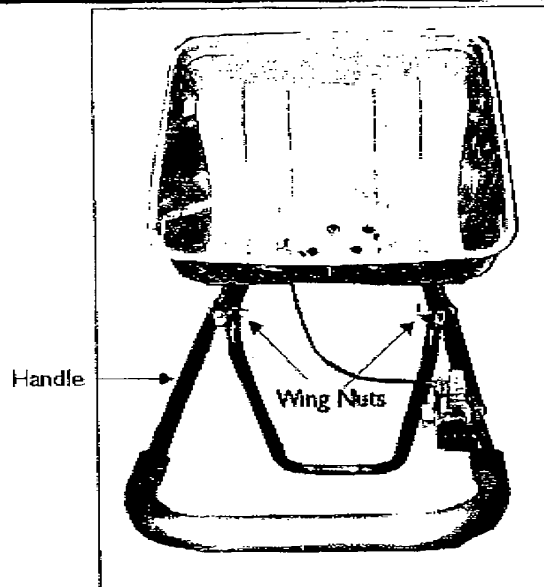


FOR STORAGE

Loosen the two Wing
Nuts and fold handle
under hopper.

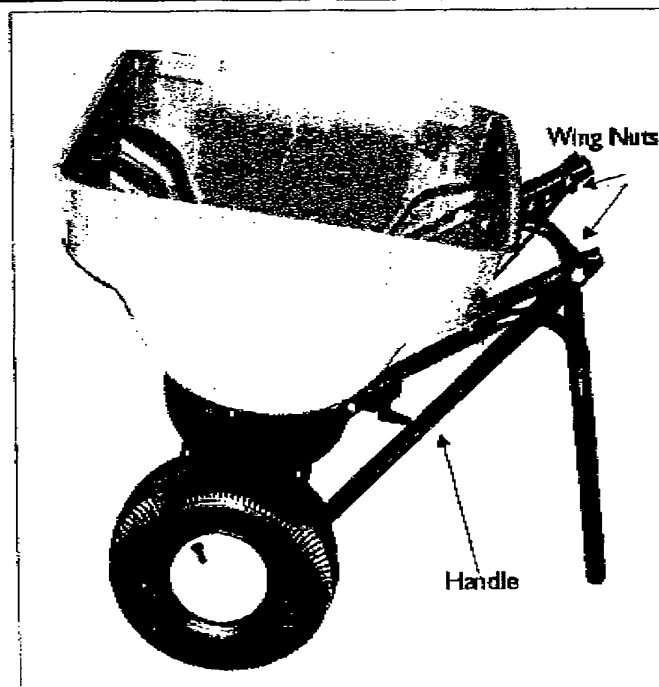

USING YOUR SPREADER

Settings are made by pressing down on the Calibration Indicator button and setting to desired number on the Control Cable Assembly.

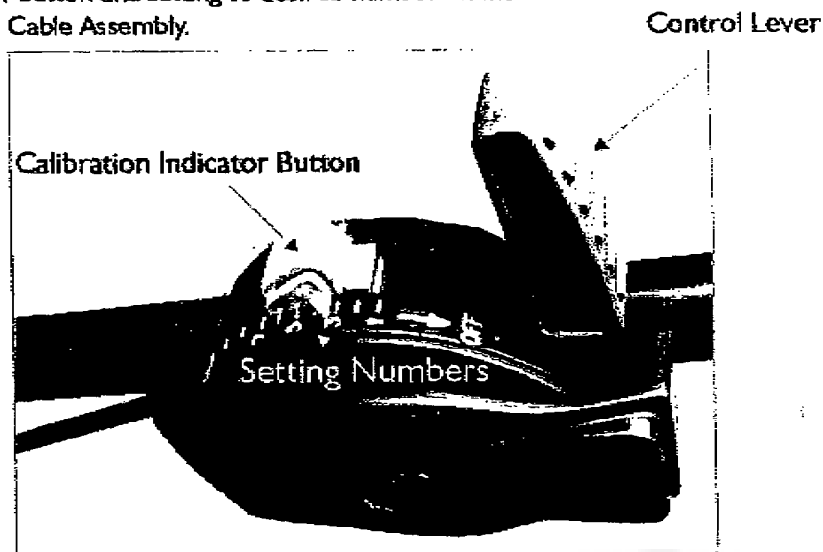

- * **TO OPEN** - Push the Control Lever forward until it stops against button.
- * **TO CLOSE** - Pull the Control Lever fully back toward Operator.

See Application chart for setting information.

MAINTENANCE INSTRUCTIONS

AFTER EACH USE: Wash unit thoroughly let dry. Lubricate moving parts, including slide plate, axle and upright shaft.

CAUTION:

CARE MUST BE TAKEN WITH ANY WEED KILLER, PESTICIDE, OR COMBINATION PRODUCT. THEY CAN BE HARMFUL TO OTHER PLANT LIFE IN THE YARD.